





ELEVATION SERIES CUBE ICE MAKER

CIM0826/O825

CIM0826/O825 CUBE ICE MAKER

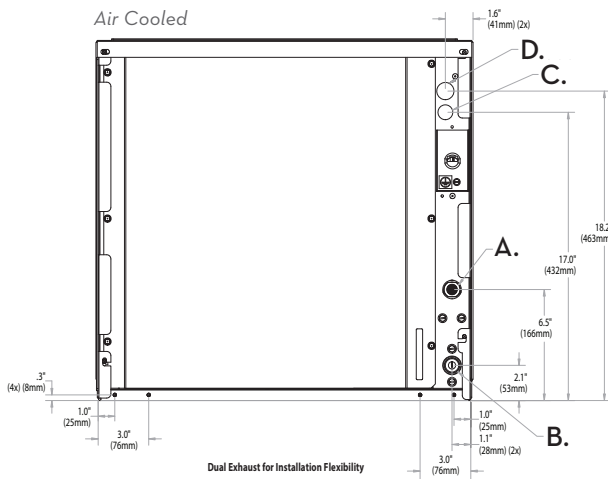


Dual Exhaust for Installation Flexibility



Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

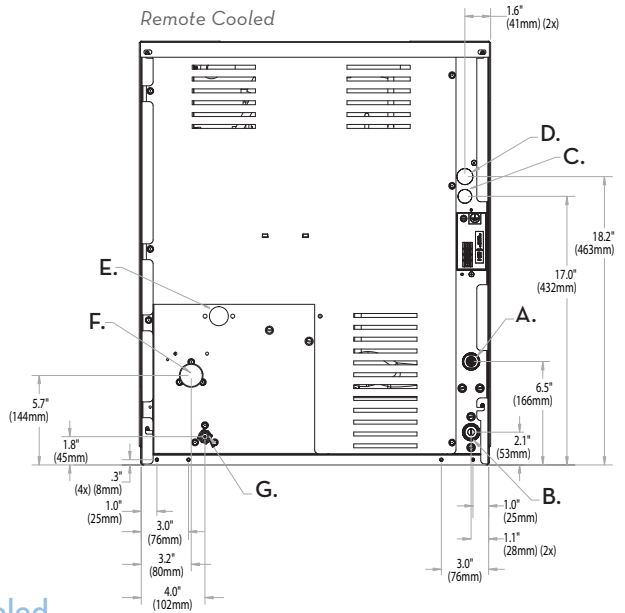

Remote Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8" (remote).
- E. Condenser water in, 3/8" FPT (water only). Discharge line, 1/2" male quick connect coupling for precharged line set (remote only).
- F. Condenser water out, 1/2" FPT (water only).
- G. Liquid line, 3/8" male quick connect for precharged line set (remote only).

Operating Requirements

	MINIMUM	MAXIMUM	
		60 Hz	50Hz
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)
Water Temp.	40°F (4.4°C)		
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG (5.5 BAR)	
Remote Condenser Temp.	-20°F (-29°C)	120°F (50°C)	

Dimensions

ALL MODELS	
W x D x H (in.)	22.25 x 24.25 x 26.9
W x D x H (mm)	565 x 616 x 683

Specifications

Model Number	Cond. Unit	Half-Cube Ice Production per 24hrs		Water Usage gallons per 100 lbs of ice 90°F air/70°F water		kWH Used per 100 lbs of ice @ 90°F air/70°F water	Voltage Characteristics	Min. Circuit Ampacity	Max Breaker Size	Approx. BTUs per hour
		70°F air/50°F water lbs (kg)	90°F air/70°F water lbs (kg)	Potable	Condenser					
CIM0826A	Air	896 (406)	668 (303)	19.0	N/A	5.2	208-230/60/1	11.8	20	15,100
CIM0826R**	Remote	906 (411)	769 (348)		4.8					
CIM0826W	Water	896 (406)	774 (351)		140.0	4.2		11.3		
CIM0825A	Air	922 (418)	726 (329)	18.0	N/A	4.73	220-240/50/1	10.8	16	14,350
CIM0825R**	Remote	912 (414)	814 (369)		4.38					
CIM0825A-49	Air	900 (408)	700 (316)		4.9	10.8				

* Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the KCUBEDISPB MUST be used.

** Remote models CIM0826R & CIM0825R require the RCA-2061 remote condenser with optional grill guard kit.

Number of Wires: 3 (including ground)
 Approx. Shipping Weight lbs (kg): CIM0826A 220 (100) • CIM0826R 220 (100) • CIM0825A 220 (100) • CIM0825R 220 (100)

REFRIGERANT: Models ending in -49 are R449A, all other models are R404A
 CIM0825A = R404A • CIM0825A-49 = R449A